

# eTIR web services - Messages E1-E2

## E1 - Register guarantee / E2 - Registration results



# Table of Contents

1. Document revision note .....	1
2. Related documents .....	1
3. Purpose .....	2
4. Target audience .....	2
5. Prerequisites .....	2
6. "E1 - Register guarantee" / "E2 - Registration results" messages .....	4
6.1. Sequence diagram .....	4
6.2. Message context .....	4
6.2.1. Message prerequisites .....	4
6.2.2. Endpoint URL and SOAP Action .....	4
6.3. "E1 - Register guarantee" request message .....	5
6.3.1. Description .....	5
6.3.2. Field details .....	5
6.3.3. Field descriptions & usages .....	6
6.3.4. Referred code lists .....	8
6.3.5. Example .....	8
6.4. "E2 - Registration results" response message .....	10
6.4.1. Description .....	10
6.4.2. Field details .....	10
6.4.3. Field descriptions & usages .....	11
6.4.4. Referred code lists .....	12
6.4.5. Conditions and rules .....	12
6.4.6. How to use response data in the guarantee chain system .....	12
6.4.7. Applicable error codes .....	12
6.4.8. Example .....	14
7. Fallback procedures .....	15
8. Support and contact .....	15
9. Version history .....	16

# 1. Document revision note



This document has been published on **08/07/2022**, and is valid for the eTIR international system version 1.0 based on the eTIR specifications version 4.3.8.

Please ensure you get the latest version of this document from the [eTIR documentation portal](#) or contact the eTIR service desk ([Support and contact](#)).

## 2. Related documents

### Project documents and collaboration platform

- eTIR documentation portal: <https://etir.org/documentation>
- Project guidelines for customs to connect to the eTIR international system : <https://etir.org/documentation/project-guidelines-customs>
- eTIR web services - Introduction document: <https://etir.org/documentation/introduction>
- eTIR web services - Messages I1-I2: I1 - Accept guarantee / I2 - Acceptance results <https://etir.org/documentation/i1-i2>
- eTIR web services - Messages I3-I4: I3 - Get holder information / I4 - Holder information <https://etir.org/documentation/i3-i4>
- eTIR web services - Messages I5-I6: I5 - Query guarantee / I6 - Query results <https://etir.org/documentation/i5-i6>
- eTIR web services - Messages I7-I8: I7 - Record declaration data / I8 - Record declaration data results <https://etir.org/documentation/i7-i8>
- eTIR web services - Messages I9-I10: I9 - Start TIR operation / I10 - Start results <https://etir.org/documentation/i9-i10>
- eTIR web services - Messages I11-I12: I11 - Terminate TIR operation / I12 - Termination results <https://etir.org/documentation/i11-i12>
- eTIR web services - Messages I13-I14: I13 - Discharge TIR operation / I14 - Discharge results <https://etir.org/documentation/i13-i14>
- eTIR web services - Messages I15-I16: I15 - Notify customs / I16 - Notification confirmation <https://etir.org/documentation/i15-i16>
- eTIR web services - Messages I17-I18: I17 - Refusal to start TIR operation / I18 - Refusal results <https://etir.org/documentation/i17-i18>
- eTIR web services - Messages I19-I20: I19 - Check customs offices / I20 - Customs offices validation <https://etir.org/documentation/i19-i20>
- eTIR web services - Messages E3-E4: E3 - Cancel guarantee / E4 - Cancellation results <https://etir.org/documentation/e3-e4>
- eTIR web services - Messages E5-E6: E5 - Query guarantee / E6 - Query results <https://etir.org/documentation/e5-e6>
- eTIR web services - Messages E7-E8: E7 - Notify guarantee chain / E8 - Notification confirmation <https://etir.org/documentation/e7-e8>
- eTIR web services - Messages E9-E10: E9 - Advance TIR data / E10 - Advance TIR data results <https://etir.org/documentation/e9-e10>
- eTIR web services - Messages E11-E12: E11 - Advance amendment data / E12 - Advance amendment data results <https://etir.org/documentation/e11-e12>

- eTIR web services - Messages E13-E14: E13 - Cancel advance data / E14 - Cancel advance data results <https://etir.org/documentation/e13-e14>

## Legal framework

- TIR Convention handbook: <https://etir.org/documentation/tir-handbook>
- Annex 11 to the TIR Convention: <https://etir.org/documentation/annex-11>

## eTIR specifications

- Introduction to the eTIR conceptual, functional and technical v4.3: <https://etir.org/etir-introduction>
- eTIR concepts v4.3: <https://etir.org/etir-concepts>
- eTIR functional specifications v4.3: <https://etir.org/etir-functional-specifications>
- eTIR technical specifications v4.3: <https://etir.org/etir-technical-specifications>

## Additional resources

- eTIR XML schemas: <https://etir.org/documentation/xsd-files>
- eTIR code lists: <https://etir.org/documentation/code-lists>
- List of eTIR focal points: <https://unece.org/list-etir-focal-points>

## 3. Purpose

This document describes the **E1 - Register guarantee** request message, and the **E2 - Registration results** response message of the eTIR international system web services. It provides all the specifics required to use them (prepare or receive), explains how and when they should be used and explains the error codes that may be returned. It also contains examples and fallback procedures, if applicable.

## 4. Target audience

This guide is intended for the ICT teams of the guarantee chains in charge of interconnecting their guarantee chain systems to the eTIR international system.

## 5. Prerequisites



In order to ensure an implementation that delivers the best value and services to the guarantee chains, we recommend the ICT team in charge of establishing the connection to the eTIR international system web services to be accompanied by a subject-matter expert on the TIR Convention.

This document is to be read after having an understanding of the [eTIR concepts](#) and having read the [eTIR functional specifications](#) as well as the [eTIR web services introduction document](#). It is highly recommended keeping the eTIR web services introduction document at hand as this document refers to many elements and diagrams that will be necessary and referred to when reading this document.

From a technical perspective, the following steps should have been completed at this point:

- the secured connection to one of the User Acceptance Testing (UAT) environments of the eTIR international system is established;
- the endpoint URL to the UAT environment is clearly identified and properly configured on the client

side;

- all the tools required to connect, test and troubleshoot the messages are ready;




All eTIR messages are identified and belong to a flow described in the [eTIR web services introduction document](#) (see dedicated section). It is key to respect this sequencing else the eTIR international system will return errors due to invalid sequencing of the message as described in the [dedicated eTIR error code web page](#).

## 6. "E1 - Register guarantee" / "E2 - Registration results" messages

### 6.1. Sequence diagram

The following sequence diagrams highlight the role and sequence position of the **E1 - Register guarantee** and **E2 - Registration results** messages in the context of a TIR departure operation.

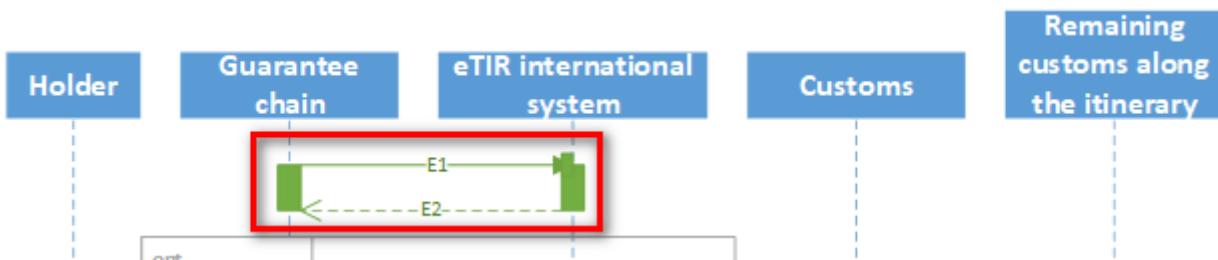

### 6.2. Message context

This message allows for the guarantee chain to register a guarantee for a TIR transport in the eTIR international system, which is a prerequisite to start any TIR operation.

#### 6.2.1. Message prerequisites

There is no prerequisite to sending an **E1 - Register guarantee** message as this one is the very first step to a TIR Transport.

#### 6.2.2. Endpoint URL and SOAP Action

The URL of the endpoint to use when sending the **E1 - Register guarantee** request message is: <https://etir-uat-01.unece.org/etir/v4.3/guaranteeChain>

Also note that the WSDL can be accessed at the following URL: <https://etir-uat-01.unece.org/etir/v4.3/guaranteeChain?wsdl>

The SOAP action value to use is: **registerGuarantee** (so the WS-Addressing element should be set to <http://etir.org/v4.3/guaranteeChain/registerGuarantee>)

## 6.3. "E1 - Register guarantee" request message

### 6.3.1. Description

The guarantee chain sends the **E1 - Register guarantee** request message to the eTIR international system to provide record the TIR transport guarantee issued to the TIR Carnet holder in the eTIR international system.

The XSD file related to the **E1 - Register guarantee** message is available at the following URL: [https://wiki.unece.org/download/attachments/106299941/WCO\\_eTIR\\_E1\\_1.xsd](https://wiki.unece.org/download/attachments/106299941/WCO_eTIR_E1_1.xsd).

### 6.3.2. Field details



Kindly note that the metadata fields have been removed from this table to improve the readability, as it is part of every eTIR message. You can find the details about these metadata fields in section 9.4 of the [eTIR introduction document](#).

eTIR field name	Mapping to the XML element (XPath)	Status	Cardinality	Format	Code lists	Conditions	Rules
<b>MESSAGE</b>							
└ Fonction message, codée	Function	R	1..1	n..2	<a href="#">CL16</a>		
└ Identifiant message	ID	R	1..1	an..70			
└ Type, codé	TypeCode	R	1..1	an..3	<a href="#">CL26</a>		
└ GARANTIE	ObligationGuarantee	R	1..1				
└ Date validité	ObligationGuarantee/ExpirationDateTime	R	1..1	an..35			
└ Date heure émission	ObligationGuarantee/IssueDateTime	R	1..1	an..35			
└ Référence	ObligationGuarantee/ReferenceID	R	1..1	an..35			
└ Type garantie, codé	ObligationGuarantee/SecurityDetailsCode	R	1..1	an..3	<a href="#">CL12</a>		
└ CHÂINEGARANTIE	ObligationGuarantee/Surety	R	1..1				
└ Code	ObligationGuarantee/Surety/ID	R	1..1	an..35			
└ TITULAIRE	ObligationGuarantee/Principal	R	1..1				
└ Identifiant	ObligationGuarantee/Principal/ID	R	1..1	an..35			

### 6.3.3. Field descriptions & usages



Kindly note that the metadata fields have been removed from this table to improve the readability, as it is part of every eTIR message. You can find the details about these metadata fields in section 9.4 of the [eTIR introduction document](#).

eTIR field name	Mapping to the XML element (XPath)	Description	Usage
<b>MESSAGE</b>			
– Fonction message, codée	Function	Code décrivant la fonction du message	La valeur doit être '9' (message initial)
– Identifiant message	ID	Identifiant unique du message	Ce champ doit contenir un identifiant unique mondial (GUID), comme indiqué dans la section correspondante du document d'introduction
– Type, codé	TypeCode	Code spécifiant le type du message	La valeur doit être 'E1'
└ GARANTIE	ObligationGuarantee	Classe représentant la garantie du transport TIR en question	
– Date validité	ObligationGuarantee/ExpirationDateTime	Date du dernier jour de validité de la garantie	Ce champ doit contenir une date, au format EDIFACT 102 (CCYYMMDD). Par exemple, 20200820 représente le 20 août 2020.
– Date heure émission	ObligationGuarantee/IssueDateTime	Date et heure auxquelles la garantie électronique a été émise par la chaîne de garantie	Ce champ doit être identique au champ 'Date émission' de la garantie électronique telle qu'enregistrée par la chaîne de garantie. The value should be a date and time to be provided following the EDIFACT 208 format CCYYMMDDHHMMSSZHHMM ( <a href="http://www.unece.org/trade/untdid/d13b/tred2379.htm">http://www.unece.org/trade/untdid/d13b/tred2379.htm</a> ). For Example: 20200820145600+0100 represents 20 August 2020 at 14:56 UTC+01:00
– Référence	ObligationGuarantee/ReferenceID	Identifiant unique de la garantie	Ce champ doit contenir l'identifiant unique de la garantie pour le transport TIR en question
– Type garantie, codé	ObligationGuarantee/SecurityDetailsCode	Code spécifiant le type de la garantie	Ce champ doit contenir le code correspondant au type de la garantie, choisi dans la liste Type garantie (eTIR)
└ CHAÎNEGARANTIE	ObligationGuarantee/Surety	Classe représentant les informations relatives à la chaîne de garantie émettrice (qui fournit une garantie pour le transport TIR)	
└ Code	ObligationGuarantee/Surety/ID	Identifiant unique de la chaîne de garantie qui a émis la garantie	La valeur doit être 'IRU' pour les garanties émises par l'Union internationale des transports routiers
└ TITULAIRE	ObligationGuarantee/Principal	Classe représentant le titulaire (transporteur) pour ce transport	

eTIR field name	Mapping to the XML element (XPath)	Description	Usage
└ Identifiant	ObligationGuarantee/Principal/ID	Identifiant unique du titulaire	Ce champ doit contenir l'identifiant unique du titulaire tel que figurant dans la Banque de données internationale TIR (ITDB)



When reading the values of the second columns for both tables, note that the "LPCO/" XML base element has been removed to improve the readability, as it is repeated on every line.

### 6.3.4. Referred code lists

The following code lists are referred to in the field lists and should be considered when sending the message:

- [CL12](#) - Guarantee type code (eTIR)
- [CL16](#) - Message function code (UN/EDIFACT 1225)
- [CL26](#) - Message types (eTIR)



All code lists are described in the [eTIR code lists document](#).

### 6.3.5. Example

The example below shows the XML data to be sent via POST method, by the guarantee chain system, to the eTIR international system [endpoint URL](#) to record the guarantee **XF95001234** which code **X03** allows for three TIR operations, issued by the guarantee provider **IRU** to the TIR Carnet holder **GEO/054/9890**, and expiring on **22/12/2022**.

**E1 - Register guarantee request message**

```
<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
    xmlns:guar="http://etir.org/v4.3/guaranteeChain"
    xmlns:md="http://etir.org/v4.3/DocumentMetaData"
    xmlns:urn="http://etir.org/v4.3/E5">
    <soap:Header xmlns:wsa="http://www.w3.org/2005/08/addressing">
        (...)

        <wsa:Action>http://etir.org/v4.3/guaranteeChain/registerGuarantee</wsa:Action>
        <wsa:MessageID>uuid:2609af3e-e6c3-45ed-ad7a-46174d9c1fe7</wsa:MessageID>
        (...)

    </soap:Header>
    <soap:Body xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
        wsu:Id="id-92d67bf1-1b57-4176-8c58-11968a3f9f01">
        <guar:registerGuarantee>
            <urn:DocumentMetadata>
                <md:ResponsibleAgencyCode>AJ</md:ResponsibleAgencyCode>
                <md:AgencyAssignedCustomizationCode>1</md:AgencyAssignedCustomizationCode>
                <md:AgencyAssignedCustomizationVersionCode>1</md:AgencyAssignedCustomizationVersionCode>
                <md:CommunicationMetaData>
                    <md:PreparationDateTime formatCode="208">20201122113346+0200</md:PreparationDateTime>
                    <md:Recipient>
                        <md:ID>eTIR international system</md:ID>
                    </md:Recipient>
                    <md:Sender>
                        <md:ID>senderID</md:ID>
                    </md:Sender>
                </md:CommunicationMetaData>
                <urn:LPC0>
                    <urn:Function>9</urn:Function>
                    <urn:ID>680134b8-daf8-4beb-8658-03643cc384ce</urn:ID>
                    <urn>TypeCode>E1</urn>TypeCode>
                    <urn>ObligationGuarantee>
                        <urn:ExpirationDateTime formatCode="102">20221222</urn:ExpirationDateTime>
                        <urn:IssueDateTime formatCode="208">20201122113346+0400</urn:IssueDateTime>
                        <urn:ReferenceID>XF95001234</urn:ReferenceID>
                        <urn:SecurityDetailsCode>X03</urn:SecurityDetailsCode>
                        <urn>Surety>
                            <urn:ID>IRU</urn:ID>
                        </urn:Surety>
                        <urn:Principal>
                            <urn:ID>GEO/054/9890</urn:ID>
                        </urn:Principal>
                    </urn:ObligationGuarantee>
                </urn:LPC0>
            </urn:DocumentMetadata>
        </guar:registerGuarantee>
    </soap:Body>
</soap:Envelope>
```



Some field original contents have been shortened (...) in this document for the sake of readability, in particular the whole **header/security** content that is described in the [eTIR web services introduction document](#).

## 6.4. "E2 - Registration results" response message

### 6.4.1. Description

The **E2 - Registration results** message is a response to the **E1 - Register guarantee** message. It confirms the reception of the advance (declaration) amendment information necessary to the next TIR operation.

The XSD file related to the **E2 - Registration results** message is available at the following URL: [https://wiki.unece.org/download/attachments/106299941/WCO\\_eTIR\\_E2\\_1.xsd](https://wiki.unece.org/download/attachments/106299941/WCO_eTIR_E2_1.xsd).

### 6.4.2. Field details



Kindly note that the metadata fields have been removed from this table to improve the readability, as it is part of every eTIR message. You can find the details about these metadata fields in section 9.4 of the [eTIR introduction document](#).

eTIR field name	Mapping to the XML element (XPath)	Status	Cardinality	Format	Code lists	Conditions	Rules
<b>MESSAGE</b>							
└ Fonction message, codée	Function	R	1..1	n..2	CL16		
└ Identifiant message initial	FunctionalReferenceID	R	1..1	an..70			
└ Identifiant message	ID	R	1..1	an..70			
└ Type, codé	TypeCode	R	1..1	an..3	CL26		
└ ERREUR	Error	D	0..*			C006	
└ Erreur, codée	Error/ValidationCode	R	1..1	an..8	CL99		
└ POINTEUR	Error/Pointer	R	1..*				
└ Numéro séquence	Error/Pointer/SequenceNumeric	R	1..1	n..5			
└ Emplacement	Error/Pointer/Location	R	1..1	an..512			

### 6.4.3. Field descriptions & usages



Kindly note that the metadata fields have been removed from this table to improve the readability, as it is part of every eTIR message. You can find the details about these metadata fields in section 9.4 of the [eTIR introduction document](#).

eTIR field name	Mapping to the XML element (XPath)	Description	Usage
<b>MESSAGE</b>			
└ Fonction message, codée	Function	Code décrivant la fonction du message	La valeur doit être '44' (Accepté sans réserve) si la demande a été traitée correctement. Si une erreur au moins est signalée dans ce message ou si le contenu ne peut être accepté, la valeur doit être '27' (Non accepté).
└ Identifiant message initial	FunctionalReferenceID	Identifiant unique du message de demande associé à cette réponse	Ce champ doit être identique au champ 'Identifiant message' du message de demande (E1)
└ Identifiant message	ID	Identifiant unique du message	Ce champ doit contenir un identifiant unique mondial (GUID), comme indiqué dans la section correspondante du document d'introduction
└ Type, codé	TypeCode	Code spécifiant le type du message	La valeur doit être 'E2'
└ ERREUR	Error	Classe représentant la liste des erreurs, le cas échéant	
└ Erreur, codée	Error/ValidationCode	Code spécifiant le type de l'erreur	Ce champ doit contenir le code spécifiant l'erreur, choisi dans la <a href="#">Error code (eTIR)</a>
└ POINTEUR	Error/Pointer	Classe représentant le pointeur qui indique le champ erroné, le cas échéant	
└ Numéro séquence	Error/Pointer/SequenceNumeric	Indice de l'erreur dans la liste	Ce champ doit contenir l'indice (commençant à 1) de l'erreur dans la liste
└ Emplacement	Error/Pointer/Location	Emplacement du champ erroné	Ce champ doit contenir l'emplacement du champ erroné selon la syntaxe XPath. Des détails supplémentaires concernant l'emplacement des champs par code d'erreur sont disponibles sur la <a href="#">page consacrée aux erreurs</a> .



When reading the values of the second columns for both tables, note that the "Response/" XML base element has been removed to improve the readability, as it is repeated on every line.

#### 6.4.4. Referred code lists

The following code lists are referred to in the field lists and should be considered when sending the message:

- [CL16](#) - Message function code (UN/EDIFACT 1225)
- [CL26](#) - Message types (eTIR)
- [CL99](#) - Error code (eTIR)



All code lists are described in the [eTIR code lists document](#).

#### 6.4.5. Conditions and rules

The following condition(s) of the [eTIR conditions list](#) are referred to in the field lists and should be considered in the message:

- **C006:** IF (MESSAGE.Message function, coded) = '6', '11', '44' OR '45'  
THEN EMPTY (ERROR)  
ELSE IF (MESSAGE.Message function, coded) = '10' OR '27'  
THEN NOT EMPTY (ERROR)

#### 6.4.6. How to use response data in the guarantee chain system

The eTIR international system will return whether there were errors while processing the request message by filling in the "Error" list. Therefore, and as for all response messages expected from the eTIR international system, the first step when parsing the **E2 - Registration results** response message should always be to look for potential error elements in the response message and address them accordingly as mentioned in the Error Management section of the [Introduction document](#).

If there was no error, and the response message content is as expected, the guarantee was properly registered in the eTIR international system and a TIR transport can be planned to use it. The next step will be for the TIR Carnet holder to send advance TIR data (for instance by sending an **E9 - Advance TIR data**) to the initial customs office of departure.

#### 6.4.7. Applicable error codes

As the eTIR international system may return error codes, the [eTIR web services introduction document](#) contains a dedicated section describing how and where to find those error codes in the response messages. Find below the list of error codes that may be returned as part of the **E2 - Registration results** response message as well as the recommended actions to address them:

##### [100 - Invalid message](#)

Kindly check the message itself and its format as it is not recognized by the eTIR international system. Kindly contact the eTIR service desk to send the content of the message communicated, the timestamps and the steps to reproduce this issue in order to address it.

##### [101 - Missing field](#)

Kindly check the message parameters, in particular the parameters marked as mandatory in the message description section of this document, and make sure that all mandatory parameters are part of the message.

##### [102 - Invalid domain for the value](#)

Kindly check the coded parameter, its values and corresponding code lists. Make sure that each coded parameter is using one of the values of the corresponding code list.

### 103 - Malformed date

Kindly check the date parameters and their format. Make sure that each date format has the format indicated and that the value follows the format/pattern.

### 105 - Field value length exceeded

Kindly check the parameter value lengths. Make sure that each parameter length does not exceed the max length as defined in the documentation in the Format column.

### 106 - Invalid pattern

Kindly check the pattern of the parameter value as it does not match the requirements set for this attribute in XML Schema Definition of the message.

### 107 - Invalid field

Kindly check the element specified as it may not follow the order defined in the XML Schema Definition of the message.

### 108 - Missing XML attribute

Kindly check that all XML tags contain their required attribute, in particular all dates should contain the attribute formatCode to specify the format in which the date is sent.

### 109 - Invalid XML attribute

Kindly check that all XML tag attribute values follow the specified code list, in particular the attribute formatCode for dates can only be either '102' or '208'.

### 156 - Condition C006 failure

Kindly check the parameters constrained by the condition [C006] and make sure their values respect:

```
IF (MESSAGE.Message function, coded) = '6', '11', '44' OR '45'  
THEN EMPTY (ERROR)  
ELSE IF (MESSAGE.Message function, coded) = '10' OR '27'  
THEN NOT EMPTY (ERROR).
```

### 200 - Invalid State

Kindly check the state of the referred object (transport, guarantee, ...) and make sure it is consistent with the eTIR international system requested web service called.

### 204 - guarantee already registered

Kindly check the state of the guarantee you tried to register as it seems to be already registered. You may use Query guarantee web service to check its existence in the eTIR international system.

### 300 - Invalid Operation

Kindly check the message content as it triggered a technical error in the eTIR international system but this one could not identify the source of the issue.

### 301 - guarantee not found

Kindly check the value of the guarantee reference ID in the message and make sure it matches the value received in previous messages.

### 302 - guarantee chain not found

Kindly check the value of the guarantee chain ID in the message and make sure it matches the value received in previous messages.

### 303 - guarantee type not found

Kindly check the value of the guarantee type in the message and make sure it belongs to the

---

Guarantee type code (eTIR) code list, and that it matches the value received in previous messages.

#### *321 - Holder not authorized*

Kindly check the value of the TIR carnét holder in the message and make sure it matches the value received in previous messages. If it does, kindly check the status of the holder using either eTIR I3 message, ITDB web service or ITDB web application.

#### *322 - Holder not found*

Kindly check the value of the TIR carnét holder in the message and make sure it matches the value received in previous messages. If it does, kindly double check the id of the holder using either eTIR I3 message, ITDB web service or ITDB web application.

#### *330 - guarantee chain not authorized*

Kindly check the value of the guarantee chain ID in the message and make sure it matches the value received in previous messages.

#### *400 - eTIR internal errors*

Kindly contact eTIR support (see [Support and contact](#)) to send the content of the message communicated, the timestamps and the steps to reproduce this issue in order to address it.



The full list of error codes can be found on the [dedicated error code list web page](#).

### 6.4.8. Example

The example below shows the XML data of the **E2 - Registration results** message received in response to the POST of the **E1 - Register guarantee** message. This response message (Function code **44 - Accepted without reserves**) of the type **E2**, containing no error codes, describes a positive acknowledgment of the guarantee registration. Therefore, it should be considered that the guarantee registration for this TIR operation has been duly recorded in the eTIR international system.

## E2 - Registration results response message

```
<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
    xmlns:ns2="http://etir.org/v4.3/guaranteeChain"
    xmlns:md="http://etir.org/v4.3/DocumentMetaData"
    xmlns:ns3="http://etir.org/v4.3/E2">
    <soap:Header xmlns="http://www.w3.org/2005/08/addressing"
        xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
        (...)

        <Action wsu:Id="id-bff8cc5d-47ff-4678-be8f-4dbdf02be491"
        >http://etir.org/v4.3/guaranteeChain/registerGuaranteeResponse</Action>
        <MessageID wsu:Id="id-a6b3a606-b809-485b-9e1b-f7cc0588f32d">urn:uuid:32a7a4e9-ae61-403e-b547-
3a4b1425605f</MessageID>
        (...)

    </soap:Header>
    <soap:Body xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
        wsu:Id="id-4440ce36-187c-4293-b387-05549263c66b">
        <ns2:registerResults>
            <ns3:DocumentMetadata>
                <md:ResponsibleAgencyCode>AJ</md:ResponsibleAgencyCode>
                <md:AgencyAssignedCustomizationCode>1</md:AgencyAssignedCustomizationCode>
                <md:AgencyAssignedCustomizationVersionCode>1</md:AgencyAssignedCustomizationVersionCode>
                <md:CommunicationMetaData>
                    <md:PreparationDateTime formatCode="208">2020112211346+0200</md:PreparationDateTime>
                    <md:Recipient>
                        <md:ID>senderID</md:ID>
                    </md:Recipient>
                    <md:Sender>
                        <md:ID>eTIR international system</md:ID>
                    </md:Sender>
                </md:CommunicationMetaData>
            <ns3:Response>
                <ns3:Function>44</ns3:Function>
                <ns3:FunctionalReferenceID>680134b8-daf8-4beb-8658-03643cc384ce</ns3:FunctionalReferenceID>
                <ns3:ID>1bd43524-d171-4130-850d-85a06c25179e</ns3:ID>
                <ns3:TypeCode>E2</ns3:TypeCode>
            </ns3:Response>
        </ns3:DocumentMetadata>
    </ns2:registerResults>
</soap:Body>
</soap:Envelope>
```



Some field original contents have been shortened (...) in this document for the sake of readability, in particular the whole **header/security** content that is described in the [eTIR web services introduction document](#).

## 7. Fallback procedures

In the event that the **E1 - Register guarantee** message could not be sent after several attempts or if no **E2 - Registration results** message was received in response, we recommend the guarantee chain team to contact eTIR service desk ([Support and contact](#)).

Also note that the functional fallback procedures can be found in the dedicated section of the [eTIR functional specifications](#).

## 8. Support and contact

Kindly note that in the context of the interconnections projects by guarantee chains, the eTIR service desk stands ready to assist their IT teams while interconnecting their information systems to the eTIR

international system. Also, in case of questions or issues related to this document or to the eTIR international system, you can use the contact details below (contacts by email should be preferred).

**Organization**      United Nations Economic Commission For Europe  
                          TIR secretariat  
                          Palais des Nations,  
                          1211 Geneva 10, Switzerland

**Contact**              Email: [etir@un.org](mailto:etir@un.org)  
                          Phone: +41 (0)22 917 55 06

## 9. Version history

Date	Author	Version	Notes	eTIR specification version reference
28/05/2021	TIR secretariat	1.0	Initial draft	4.3a
06/09/2021	TIR secretariat	1.1	Added message metadata documentation and updated URLs to point to new eTIR documentation portal	4.3.0
17/11/2021	TIR secretariat	1.2	Updated references to the newly published online code lists document	4.3.0
22/12/2021	TIR secretariat	1.3	Updated links to code lists	4.3.8
08/07/2021	TIR secretariat	1.4	Updated link to endpoints and SOAP actions	4.3.8